



**QVIS®**

## 8MP NETWORK IR WATER - PROOF DOME CAMERA



### FEATURES:



- 8MP ( 3840 × 2160 ) H.265 full real time coding
- Max.resolution: 3840 × 2160; ICR auto switch, true day / night
- 30 ~ 50m IR night view distance; Motorized zoom lens
- 3D DNR, true WDR, HLC, BLC, Smart IR and ROI coding
- One CVBS output and one on-board CVBS output
- One MIC IN and one built-in MIC; Hardware reset
- Built-in micro SD card slot, up to 128GB
- DC12V/PoE power supply
- Support smart phone, iPad, remote monitoring
- IP67 ingress protection; Support three streams
- P2P function optional
- Support face detection

| SPECIFICATION              | MEYEVIP-4K-VG / MEYEVIP-4K-VW                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>CAMERA</b>              |                                                                                                                                 |
| Image Sensor               | 1 / 2.5 "CMOS                                                                                                                   |
| Image Size                 | 3840 × 2160                                                                                                                     |
| Electronic Shutter         | 1 / 25 s ~ 1 / 100000 s                                                                                                         |
| Iris Type                  | Fixed Iris                                                                                                                      |
| Min. Illumination          | 0.024 lux @F1.2, AGC ON; 0 lux with IR<br>0.068 lux @F2.0, AGC ON; 0 lux with IR                                                |
| Lens                       | 3.3 ~ 12 mm @F1.4; Horizontal field of view: 97.5° ~ 38.5°                                                                      |
| Lens Mount                 | Φ14                                                                                                                             |
| Wide Dynamic Range         | 120dB                                                                                                                           |
| BLC / HLC                  | Yes / Yes                                                                                                                       |
| Defog                      | Yes                                                                                                                             |
| Digital NR                 | 3D DNR                                                                                                                          |
| Angle Adjustment           | Pan: 0°~360°, Tilt: 0°~75°, Rotation: 0°~360°                                                                                   |
| <b>IMAGE</b>               |                                                                                                                                 |
| Video Compression          | H.265 / H.264 / MJPEG                                                                                                           |
| H.264 Compression standard | Baseline Profile / Main Profile / High Profile                                                                                  |
| Resolution                 | 8MP (3840×2160), 2K (2560×1440), 3MP (2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240                          |
| Main Stream                | 60Hz: 8MP/ 2K/3MP/ 1080P/ 720P(1~30fps)<br>50Hz: 8MP/ 2K/3MP/ 1080P/ 720P(1~25fps)                                              |
| Sub Stream                 | 60Hz: 1080P (1-5fps)/720P(1~10fps)/D1 (1-30fps);<br>50HZ: 1080P(1~25fps)/720P(1~25fps)/ D1(1~25fps)                             |
| Third Stream               | 60Hz: 720P/D1/CIF/480 240 (1~30fps);<br>50HZ: 720P/D1/CIF/480× 240 (1~25fps)                                                    |
| Bit Rate                   | 128 Kbps ~ 12 Mbps                                                                                                              |
| Bit Rate Type              | VBR / CBR                                                                                                                       |
| Smart IR                   | Yes                                                                                                                             |
| Image Settings             | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser |
| Audio Compression          | G711A / U                                                                                                                       |
| ROI                        | Each ROI to be configured separately                                                                                            |
| <b>INTERFACES</b>          |                                                                                                                                 |
| Network                    | RJ45 × 1, 10M / 100M self-adaption                                                                                              |
| Video Output               | CVBS output (BNC × 1); one on-board CVBS output                                                                                 |
| Audio                      | MIC IN × 1; built-in MIC × 1                                                                                                    |
| Storage                    | Built-in micro SD card slot; up to 128GB                                                                                        |
| Hardware Reset             | Yes                                                                                                                             |



**QVIS®**

## 8MP NETWORK IR WATER - PROOF DOME CAMERA





### FEATURES:

- 8MP ( 3840 × 2160 ) H.265 full real time coding
- Max.resolution: 3840 × 2160; ICR auto switch, true day / night
- 30 ~ 50m IR night view distance; Motorized zoom lens
- 3D DNR, true WDR, HLC, BLC, Smart IR and ROI coding
- One CVBS output and one on-board CVBS output
- One MIC IN and one built-in MIC; Hardware reset
- Built-in micro SD card slot, up to 128GB
- DC12V/PoE power supply
- Support smart phone, iPad, remote monitoring
- IP67 ingress protection;
- Support three streams
- P2P function optional
- Support face detection

| SPECIFICATION         | MEYEVIP-4K-VG / MEYEVIP-4K-VW                                                                                                                                                                   |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FUNCTIONS</b>      |                                                                                                                                                                                                 |
| Remote Monitoring     | Web browsing, CMS remote control                                                                                                                                                                |
| Online Connection     | Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission                                                                                                 |
| Network Protocol      | UDP, IPv4, IPv6,DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS                                                                                                         |
| Interface Protocol    | ONVIF, GB-T/28181-2011                                                                                                                                                                          |
| Storage               | Network remote storage, micro SD card storage                                                                                                                                                   |
| Smart Alarm           | Motion detection; SD card error; SD card full                                                                                                                                                   |
| Intelligent Analytics | Face Detection (object removal detection, regional intrusion detection, abnormal video detection, line crossing detection, people intrusion, people counting, crowd density detection optional) |
| General function      | Watermark, IP address filtering, video mask, heartbeat, password protection                                                                                                                     |
| PoE                   | Yes                                                                                                                                                                                             |
| IR Distance           | 30 ~ 50 m                                                                                                                                                                                       |
| Ingress Protection    | IP67                                                                                                                                                                                            |
| <b>OTHERS</b>         |                                                                                                                                                                                                 |
| Power Supply          | DC12V / PoE                                                                                                                                                                                     |
| Power Consumption     | < 9.5W                                                                                                                                                                                          |
| Operating Environment | -30°C ~ +60°C; Humidity: less than 95 % (non-condensing)                                                                                                                                        |
| Dimensions (mm)       | Φ 111.5 × 99.6                                                                                                                                                                                  |
| Weight (net)          | 0.67KG                                                                                                                                                                                          |
| Installation          | Ceiling mounting<br>(Wall mounting available with the junction box and bracket)                                                                                                                 |

### DIAGRAM:

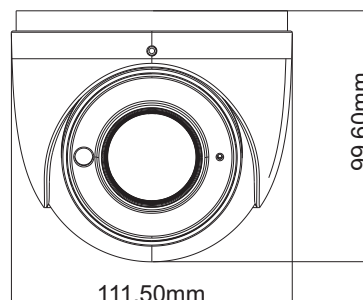

For further information on our products visit our website [www.qvisglobal.com](http://www.qvisglobal.com), email: [sales@adata.co.uk](mailto:sales@adata.co.uk), Sales Line: (023 92 488300).