




QVIS® | 4-IN-1 8MP VANDAL DOME


4K HD DIGITAL CAMERA • AHD • TVI • CVI • CVBS

KEY FEATURES

- 4K (8MP)
- 3DNR Noise Reduction
- 12V DC
- Wide Dynamic Range (D-WDR)
- IP66 Rating

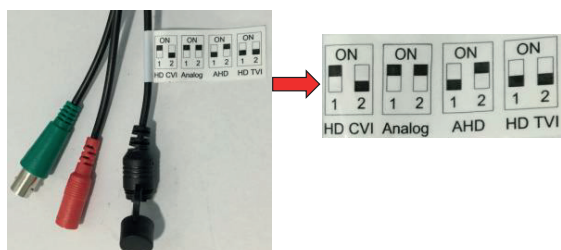

| SPECIFICATION | Q4K-VAN-VFW |
|-----------------------|---|
| CAMERA | |
| Image Sensor | 1/1.8" 4K low light and low-power image sensor |
| Signal System | PAL / NTSC |
| Active Pixels | 3840(H) x 2160(V) |
| Lens | 3.6 -11mm 4K lens |
| Angle of View | H:102° - 40° |
| Horizontal Resolution | 4K (8MP) |
| Min Illumination | 0 Lux (IR ON - IR-cut technology) |
| Menu | UTC Control (the video output mode, can ONLY be selected by the dip switch cable) |
| Language | ENG / CHN / GER / FRA / ITA / SPA / POL / RUS / POR / NED / TUR / JPN |
| Shutter | FLK / Auto |
| Day / Night | Ext / Auto / Colour / B&W |
| White Balance | ATW / ATW->SET |
| 3DNR | Low / Middle / High |
| Mirror | Mirror / V-Flip / Rotate / Off |
| Brightness | 0-100 (LSC : On/Off) |
| Video Output | TVI / AHD / CVI / CVBS ** Factory Default is TVI |
| Power Supply | DC12V ±10% |
| Current Consumption | 140 mA (IR OFF), 340 mA (IR ON) |
| IR Led | 30 pcs |
| IR Distance in Effect | 20 - 30M |
| IP Rating | IP66 |
| Storage Temperature | -50°C ~ +90°C |
| Operating Temperature | -30°C ~ +70°C |
| Dimension | Φ145 x 115 mm |
| Weight | 800g |

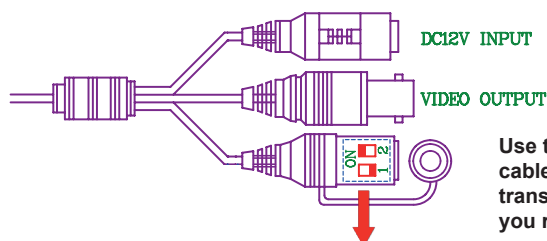

Use the dip switch cable to set the video transmission format you require



**** Factory Default is TVI**