

# NXG-7002-SIM

## Optional WiFi/4G plug-on module for the xGenConnect panel series

### General

---

The 4G/WiFi module adds 4G cellular communication capabilities to the xGenConnect series intrusion panels, allowing alarm reporting and remote connections over the 4G mobile network.

The NXG-7002-SIM has a SIM card pre-installed and once powered, will automatically connect to Carrier's UltraSync Cloud Portal Service. The SIM card should not be removed.

In the event that the primary path (WiFi or Ethernet/Internet) is not available, the panel will automatically switch to the 4G cellular path to provide seamless alarm reporting.

If 4G is unavailable, the module will switch to 2G depending local provider networks or cellular coverage.


Supporting up to 2 antenna connections for both cellular as well as WiFi, the module ensures a reliable wireless link.

### WiFi Capabilities

---

The on-board WiFi router can connect to the customer's router for primary internet access. This avoids having to install an ethernet cable between the xGenConnect panel and the customer's router.

The WiFi router also provides a wired ethernet LAN should there be a need for a wired connection of one or more UltraSync cameras.

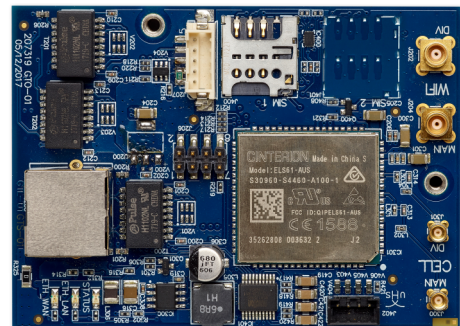

### Details

---

- 4G with 2G fallback
- Primary or backup reporting
- Wired Ethernet LAN
- WiFi and cellular antenna included
- Antenna Diversity
- Several diagnostic LEDs on-board

# NXG-7002-SIM

## Optional WiFi/4G plug-on module for the xGenConnect panel series

### Technical specifications

---

#### System

Product line	xGenConnect
Kit	No

#### Communication

IP	10/100Base-T IP/LAN
Cellular	4G LTE FDD Bands 1,3,8,20,28 2G GSM 900/1800

#### Electrical

Operating voltage	13.8 VDC (provided by panel)
Current consumption	Max 200mA at 13.8V Typical 118mA at 13.8V

#### Physical

Physical dimensions	85 x 62 x 28 mm
Shipping weight	150 g
External antenna	Included, 2 pieces
Antenna connector	2x MAIN, 2x DIV, type MMCX
SIM card slots	1
SIM Format	Micro

#### Environmental

Operating temperature	0 to +55°C
Storage temperature	-34° to 60°C
Relative humidity	90% non-condensing

#### Regulatory

EN50131 Grade	Grade 2
Compliance	CE
Certification	EN50131 Grade 2, INCERT, NFA2P

#### Alarm Reporting

NXG-7002-SIM (incl UTC UltraSync SIM card)
NXG-7002 (excl UTC SIM OH-NetRec card)



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 10:32