

BULLETVIPS4-6-FG

6MP IP FIXED BULLET CAMERA



- 6MP (3072 × 2048)
- H.265+/H.265/H.264+/H.264/ MJPEG coding
- 3D DNR, WDR, HLC, BLC
- Up to 50m IR night view distance
- DC12V/PoE power supply
- Starlight technology
- IP67 ingress protection
- Supports three streams
- Supports mobile surveillance by smart phones with iOS or Android OS
- Intelligent analytics


Specification	BULLETVIPS4-6-FG
Camera	
Image Sensor	1 / 2.7 " CMOS
Image Size	3072 × 2048
Electronic Shutter	1/1 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.07lux @ F1.6,AGC ON; 0 lux with LED
Lens	2.8mm@F1.6, V.FoV:57°; D.FoV:131°
Lens Mount	M12
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Day & Night	ICR
Digital NR	Yes
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264/ MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	6MP (3072 × 2048), 5MP (2880 × 1620), 4MP (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, 480× 240, CIF
Main Stream	60Hz: 6MP/5MP(1~20fps);4MP/3MP/1080P/720P(1~30fps); 50Hz: 6MP/5MP(1~20fps)/4MP/3MP/1080P/720P(1~25fps)
Sub Stream	60Hz: 720P/D1/CIF (1~30fps);50Hz: 720P/D1/CIF (1~25fps)
Third Stream	60Hz: D1/480× 240/CIF (1~30fps);50Hz: D1/ 480× 240/CIF(1~25fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1CH built-in mic
Storage	Built-in micro SD card slot; up to 256GB
Hardware Reset	Yes
Functions	
Remote Monitoring	Web client, NVR, NVMS 2.0 or app
Web Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPs, HTTP POST, QoS
Interface Protocol	ONVIF

BULLETVIPS4-6-FG



- 6MP [3072 × 2048]
- H.265+/H265/H.264+/H264/MJPEG coding
- 3D DNR, WDR, HLC, BLC
- Up to 50m IR night view distance
- DC12V/PoE power supply
- Starlight technology
- IP67 ingress protection
- Supports three streams
- Supports mobile surveillance by smart phones with iOS or Android OS
- Intelligent analytics

Specification	BULLETVIPS4-6-FG			
Functions				
Storage	Network remote storage; micro SD card storage			
Smart Alarm	Motion detection, SD card full, SD card error			
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern			
PoE	Yes			
IR Distance	Up to 50 m			
Ingress Protection	IP67			
DORI				
Lens	Detect	Observe	Recognise	Identify
2.8mm	59.67m (195.76ft.)	23.87m (78.31ft.)	11.93m (39.14ft.)	5.97m (19.58ft.)
Others				
Power Supply	DC12V/PoE			
Power Consumption	< 8.5W			
Storage Environment	-30°C ~ +65°C [-22°F ~ +149°F] Humidity: less than 95 % non condensing			
Operating Environment	-30°C ~ +60°C [-22°F ~ +140°F] Humidity: less than 95 % non condensing			
Dimensions [mm]	217.8 × 80.5 x 80.3			
Weight [net]	Approx. 0.66KG			
Installation	Ceiling mounting; Wall mounting			
Certificate	CE, FCC			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)			

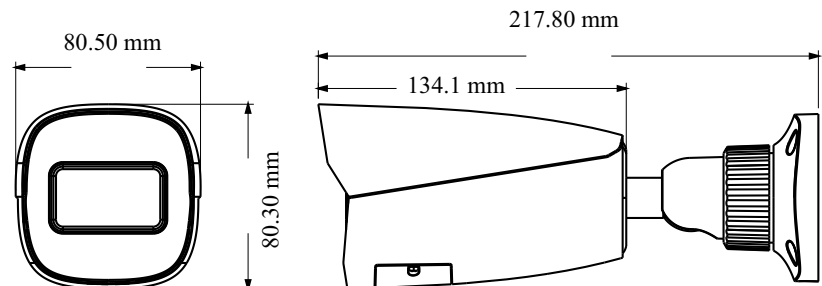

PoE

